




iPad 3 4G Speaker Replacement

Removing the dock connector with the battery out


Written By: Brett Hartt

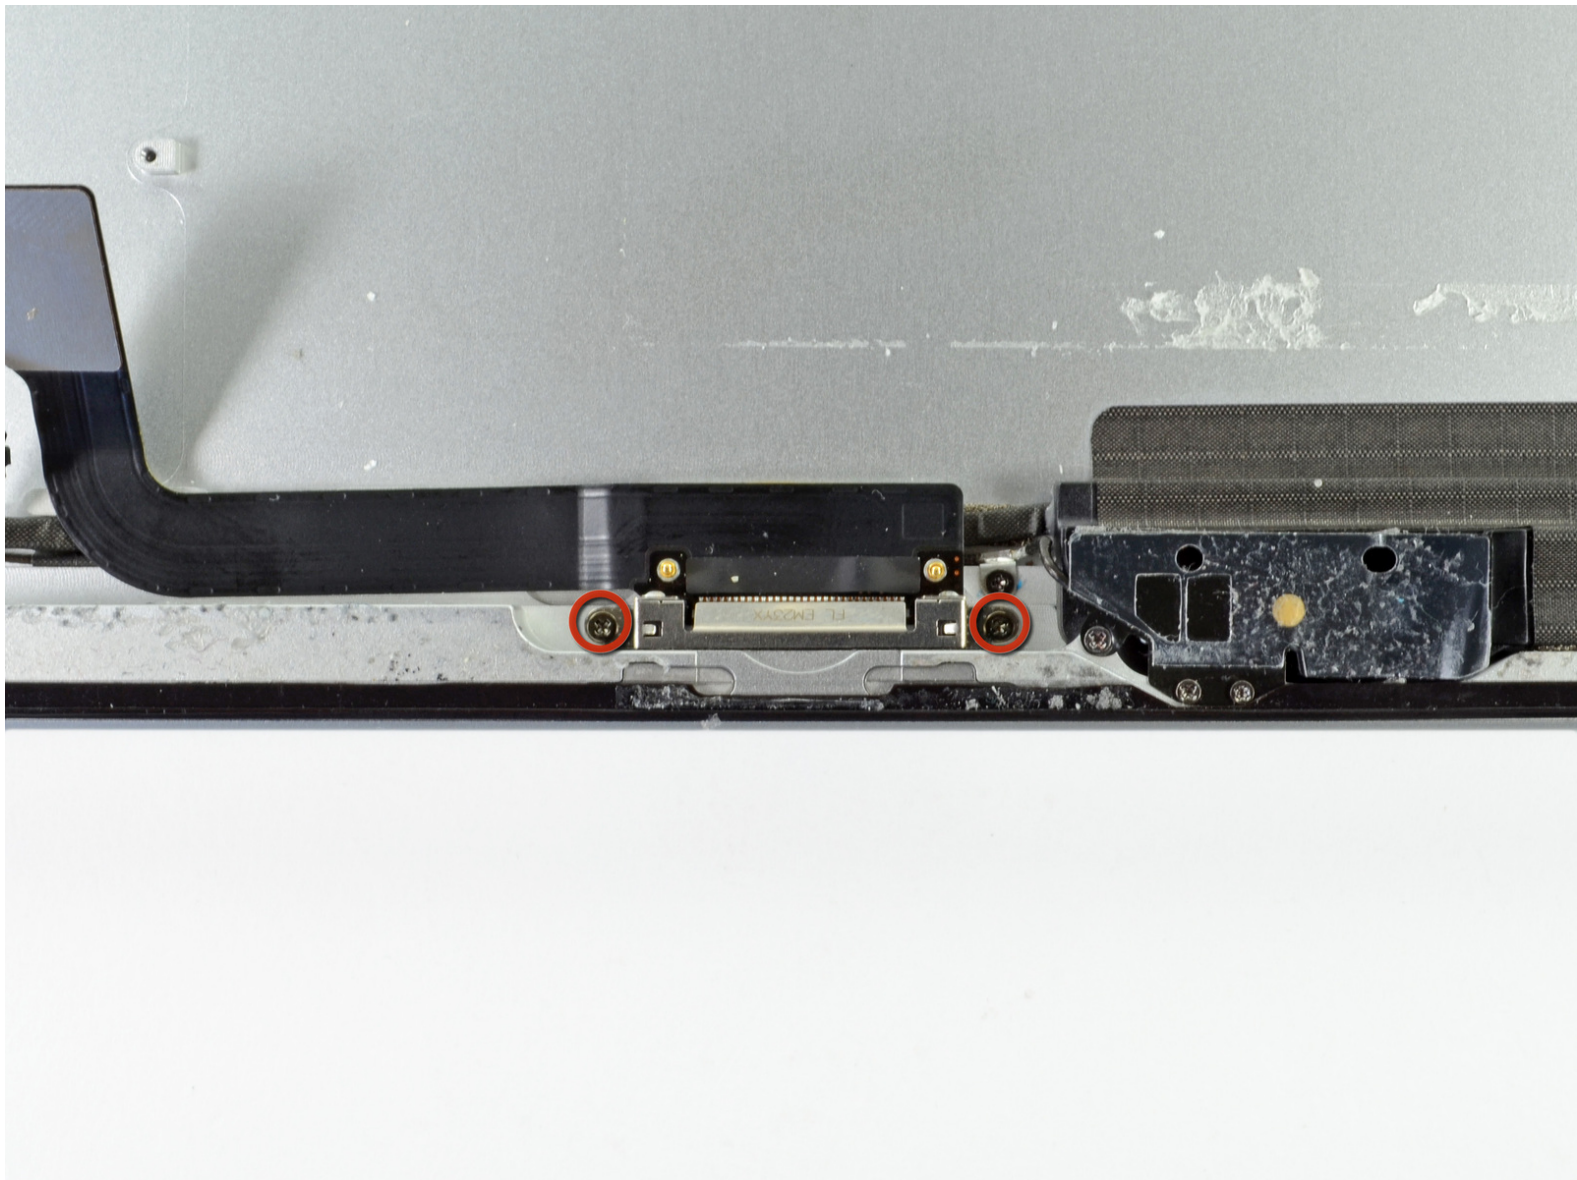

INTRODUCTION


Removing the dock connector with the battery out

Step 1 — Speaker

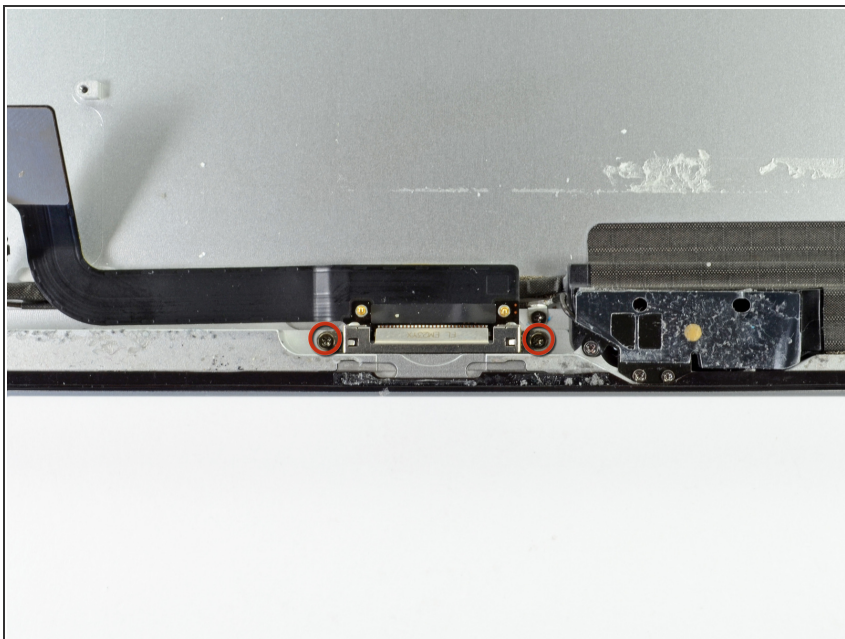

- Remove the two 1.8 mm Phillips #00 screws securing the dock connector to the rear aluminum case.

Step 2

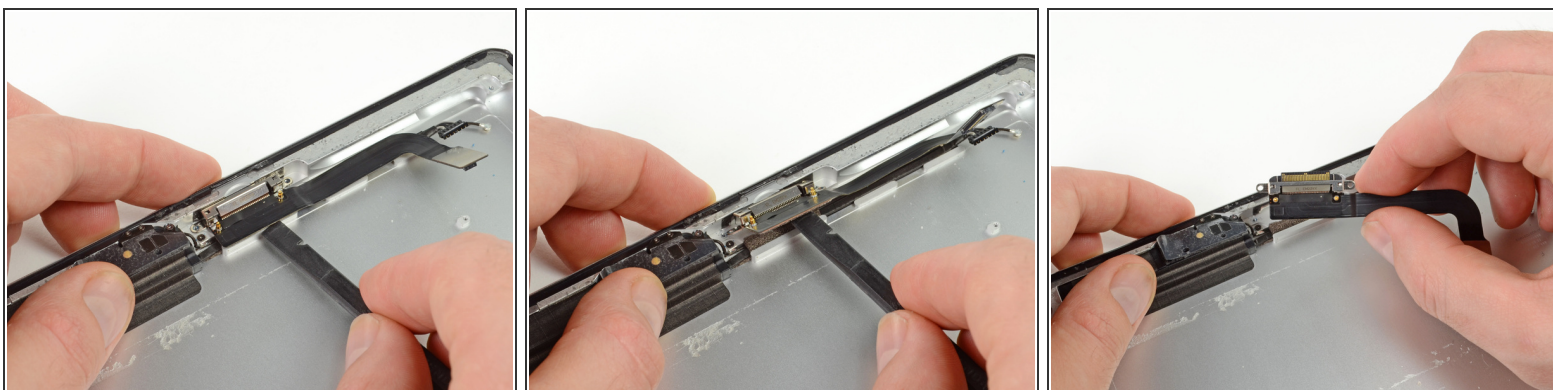

- Using the flat end of a spudger, lift up the dock connector.
- Remove the dock connector from the iPad.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-24 01:25:00 PM.